



Our STANDARD ENCLOSURES 10 Series provides an easy and economical way to meet the EIA Standard 19" rack-mount equipment requirements. This series is made from both steel and aluminum. The steel portions and rear are painted with a texture finish in either black or gray (special color is available upon request). All panels are bolted together by 6-32 screws.

QUICK REFERENCE GUIDE

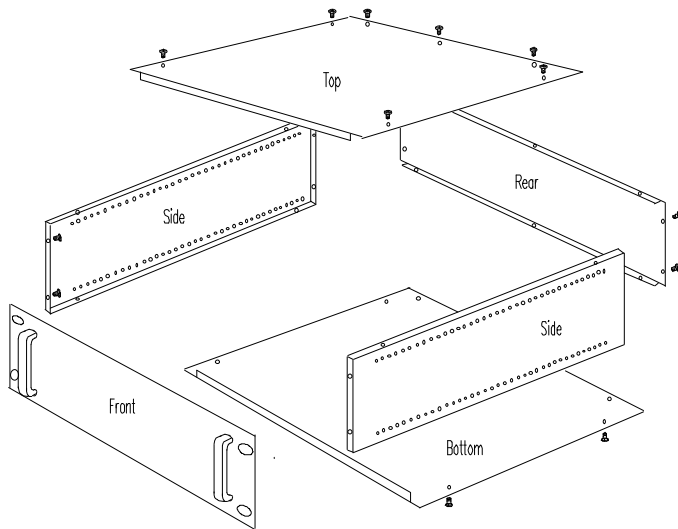

RACK UNIT	STOCK No.	DIMENSIONS (inch)	
		Height	Depth
1	10-19082x	1.74	8.00
1	10-19112x	1.74	11.00
1	10-19142x	1.74	14.00
1	10-19172x	1.74	17.00
1	10-19202x	1.74	20.00
2	10-19083x	3.49	8.00
2	10-19113x	3.49	11.00
2	10-19143x	3.49	14.00
2	10-19173x	3.49	17.00
2	10-19203x	3.49	20.00
3	10-19085x	5.23	8.00
3	10-19115x	5.23	11.00
3	10-19145x	5.23	14.00
3	10-19175x	5.23	17.00
3	10-19205x	5.23	20.00
4	10-19087x	6.97	8.00
4	10-19147x	6.97	14.00
4	10-19177x	6.97	17.00
4	10-19207x	6.97	20.00
5	10-19149x	8.73	14.00
5	10-19179x	8.73	17.00
5	10-19209x	8.73	20.00

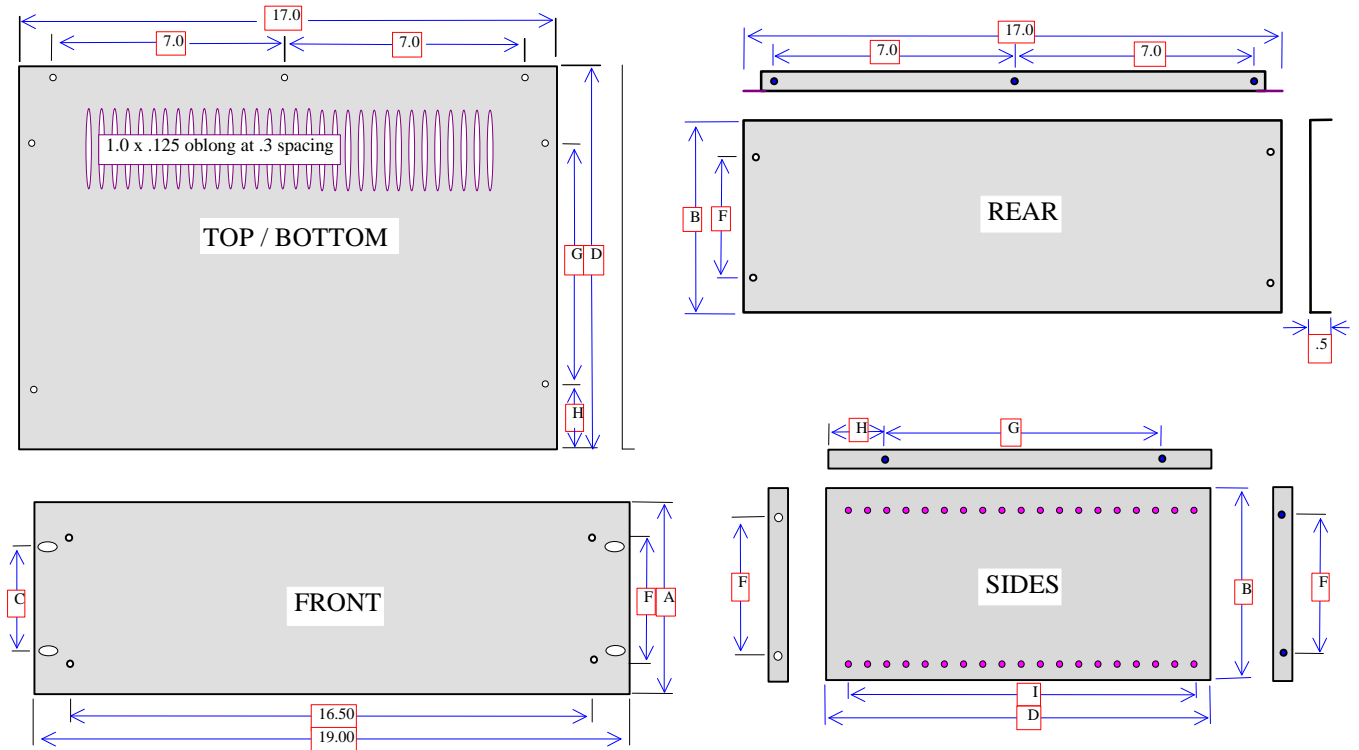

NOTES:

Front panel is 0.125" aluminum alloy (5052-H32) with brushed finish in black or clear anodize, other panels are 0.05" thick steel painted in black or gray, and rear panel is 0.06" thick aluminum alloy (5052-H32) painted. Aluminum handles and hardware are included.

All screw holes are installed with 6-32 steel press-nuts to increase strength and reliability.

Standard vent holes are punched on top. Two rows of round holes are punched on side panels for mounting channels or used as vent holes. Add suffix-x for your choice of color or finish:

- B black anodize front & painted black
- G clear anodize front & painted gray
- E painted in beige

RACK UNIT	STOCK No.	DIMENSIONS (inch)										WEIGHT (LBS)
		A	B	C	D	E	F	G	H	I	J	
1	10-19082x	1.74	1.42	1.25	8.0	-	1.00	6.00	1.0	7.0	-	6
1	10-19112x	1.74	1.42	1.25	11.0	-	1.00	5.0x2	0.5	10.0	-	6
1	10-19142x	1.74	1.42	1.25	14.0	-	1.00	6.0x2	1.0	13.0	-	8
1	10-19172x	1.74	1.42	1.25	17.0	-	1.00	8.0x2	1.0	16.0	-	10
1	10-19202x	1.74	1.42	1.25	20.0	-	1.00	6.0x3	1.0	18.0	-	11
2	10-19083x	3.49	3.18	3.00	8.0	-	2.00	6.00	1.0	7.0	-	6
2	10-19113x	3.49	3.18	3.00	11.0	-	2.00	5.0x2	0.5	10.0	-	7
2	10-19143x	3.49	3.18	3.00	14.0	-	2.00	6.0x2	1.0	13.0	-	8
2	10-19173x	3.49	3.18	3.00	17.0	-	2.00	8.0x2	1.0	16.0	-	10
2	10-19203x	3.49	3.18	3.00	20.0	-	2.00	6.0x3	1.0	18.0	-	12
3	10-19085x	5.23	4.93	2.25	8.0	-	3.75	6.00	1.0	7.0	-	7
3	10-19115x	5.23	4.93	2.25	11.0	-	3.75	5.0x2	0.5	10.0	-	9
3	10-19145x	5.23	4.93	2.25	14.0	-	3.75	6.0x2	1.0	13.0	-	10
3	10-19175x	5.23	4.93	2.25	17.0	-	3.75	8.0x2	1.0	16.0	-	13
3	10-19205x	5.23	4.93	2.25	20.0	-	3.75	6.0x3	1.0	18.0	-	14
4	10-19087x	6.97	6.68	4.00	8.0	-	5.50	5.0x2	1.0	7.0	-	8
4	10-19147x	6.97	6.68	4.00	14.0	-	5.50	6.0x2	1.0	13.0	-	13
4	10-19177x	6.97	6.68	4.00	17.0	-	5.50	8.0x2	1.0	16.0	-	15
4	10-19207x	6.97	6.68	4.00	20.0	-	5.50	6.0x3	1.0	18.0	-	17
5	10-19149x	8.73	8.42	5.75	14.0	-	7.25	6.0x2	1.0	13.0	-	15
5	10-19179x	8.73	8.42	5.75	17.0	-	7.25	8.0x2	1.0	16.0	-	17
5	10-19209x	8.73	8.42	5.75	20.0	-	7.25	6.0x3	1.0	18.0	-	20